

HDMI Media-Player PRO III Wifi

Fanless pocket size plug-n-play 1080p media player



Choosing a reliable, easy-to-install media player is the first milestone in deploying a successful digital signage project. The Media-Player PRO III Wifi is designed with this in mind with its unique heat dissipation enclosure. HDMI built-in connector designed similar to a media stick, and commercial grade solid-state fanless design, all consolidated into a pocket size player.



Small size, high performance

Despite its small size, there is no compromise to the functionality and performance - stunning graphics and 1080p video playback, smooth ticker message speed. Realtime weather reports, up-to-date news displays and much more. If a project has a limited budget, Media-Player PRO III Wifi is the best-priced performance media player.

Highlights

- **Small size, high performance**
- **Easy to install, simple to use**
- **Reliable**

Suitable for

- **Digital menus**
- **Digital signboards**
- **Electronic information**
- **Hotel Information Signs**
- **Shopping mall displays**
- **Church and Community information**
- **Recreation center information**
- **Airport & railway station**



Easy-to-install, simple-to-use

Keep the installation of digital signage simple with the Media-Player PRO III Wifi. This pocket-size player can be easily mounted or simply attached to a surface with Velcro behind any display. There is no need to install an OS or go through time consuming system setups - the Media-Player PRO III Wifi is ready to use and it comes with the free user-friendly SignApps Express to get the device playing content in no time.



Reliable

Media-Player PRO III Wifi is a commercial grade product. It is designed and stress tested to survive under most commonly encountered mishaps such as power outages. The 5 dB wireless antenna gives the player the most reliable signal reception even behind screens or interfering environments. It also has an Ethernet port built into its small body for a stable network connection.

Technical Specification

POPAI Screen Media Standards Support

HTML5, JavaScript, and CSS. W3C SMIL for cross-platform management. W3C Widgets for HTML delivery. POPAI Digital Signage Content Standards including:

- S1 (JPEG 480p baseline)
- S2 (JPEG 720p baseline)
- S3 (JPEG 1080p baseline)
- S4 (MPEG L2 audio)
- S5 (MP3 audio, 384Kbps)
- S6 (MPEG-1 SIP, 3Mbps CBR)
- S7 (MPEG-1 480p, 10Mbps CBR)
- S8 (MPEG-1 720p, 15Mbps CBR)
- S9 (MPEG-2 480p, 6Mbps CBR)
- S10 (MPEG-2 720p, 12Mbps CBR)
- S11 (H.264/MPEG-4 AVC, 480p, 6Mbps CBR)
- S12 (H.264/MPEG-4 AVC, 720p, 10Mbps CBR)
- E1 (PNG 24bpp+alpha, 480p)
- E3 (PNG 24bpp+alpha, 1080p)
- E4 (VC-1/WMV9, MP@ML, 720p)
*Video only
- E5 (VC-1/WMV9, MP@HL, 1080p)
*Video only
- E6 (MPEG-2, 1080p, 20 Mbps CBR)
- E7 (MPEG-4 ASP, 480p, 10 Mbps CBR)
- E8 (MPEG-4 AVC, 1080p, 10 Mbps CBR)

Local Storage

8 GB flash memory (approx. 360 minutes video @3 Mbps). Micro SD card slot (support up to 32GB storage)

Advanced Signage Features

Remote commissioning. AlwaysOn, AppLock to prevent unauthorized access. Strong Cache for continued playback even when network is not available.

HTML5 Support

SmartWidgets™ for calendar, clock, news, weather, and web page integration. HTML5 technologies including CSS and Javascript. WebKit-based browser engine, same as Google Chrome™ and Apple Safari® browsers.

Digital Signage Features

Auto-play starts playing scheduled contents automatically when power is re-established. Automatic error recovery with built-in WDT Real-time clock with backup clock battery.

Content Management

SignApps Express starter utility
3rd party solution (optional license)

Connectivity

- Wi-Fi: 802.11 b/g/n
- HDMI 1.4
- Ethernet 10/100 BASE-T
- USB 2.0 High Speed-Host x 2
- Optional 3G/4G USB-Modul
- Micro SD card slot

Mounting Options

Built-in mounting holes 100 x 115 mm

Supplied Accessories

- HDMI extension cord
- External 5dB Wi-Fi antenna
- Vesa mount plate
- Velcro

Expansion Options

16GB/32GB micro SD/SDHC memory card

Power

Input: 100-240V, 50-60 Hz
Output: 5.35 V, 2A DC

Environmental

Operating temperature: 0 to 40° C
Humidity: 10 to 85% @ 40° C, non-condensing

Dimensions (WxDxH)

107 mm x 68 mm x 25,3 mm
4.21" x 2.68" x 1"

Weight


108 g / 0.24 lbs

Certifications

CE/FCC/IC

Warranty

1-year limited parts & labor

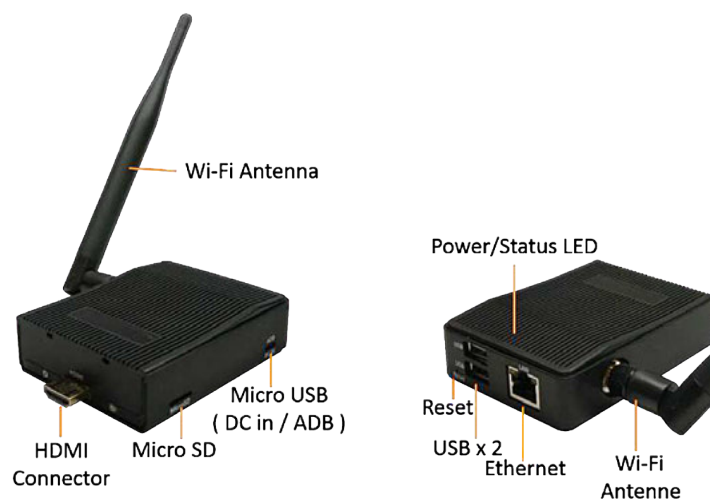

Distribution Europe:

itworx-pro GmbH
Am Stadtrand 50
D-22047 Hamburg/Germany
Tel.: +49 (0) 40 / 696 53 77-0
Fax: +49 (0) 40 / 696 537-719