

SMIL-Signboard II 24

24-inch Wide-angle Full-HD Network Display



The SMIL-Signboard II 24 Digital Signboard is the industry's first to provide vivid video playback with dedicated hardware-based High Definition (HD) 1080p video decoding, capable of rendering dynamic information using HTML5 technology, and be manageable from leading software solutions via SMIL. The device is designed primarily for use with a management server.

Full-HD1080p 24" Wide-angle MVA panel

The SMIL-Signboard II 24 offers the industry's highest standards for hardware video decoding performance. Support for S1 to S12 media profiles, as defined by POPAI, the industry's standards establishing organization, simplifies device selection and content creation. **Multi-zone screen layout**, transparent PNG overlay, and graphical scrolling ticker support offer greater flexibility for signage display. The 24-inch, 24-bit color MVA panel offers 16.7 million colors at 1920x1080 resolution for optimal presentation of 1080p HD video and HD images. The Wide viewing angle of the MVA LCD makes it suitable for 9:16 portrait-mode content display.

Dynamic display with latest technology

Employing the latest content technology HTML5, the SMIL-Signboard II 24 is designed for displaying a wide range of dynamic information at the point of service. A capable web developer can quickly integrate news, weather, sports, financial data, as well as social media feeds to make digital signage more relevant and interesting. The same technology enables pulling live data from back-end database to show transit arrival/departure information, service queue status, and corporate-level management information.

Supported by most management solution

SMIL-Players SMIL open standard players offer a new class of dedicated hardware that works with your existing management solution. SMIL-Player works with leading signage companies to provide a repertoire of modular signage hardware, from shelf-top 10" digital signboards, HD poster displays, to Blu-ray-quality HD video appliances and 24" all-in-one Full-HD video signboards. Developers can also leverage W3C SMIL (Synchronized Multimedia Integration Language) compatibility across various SMIL based signage appliances to meet project-specific budgets and changing criteria. budgets and changing criteria.

Highlights

- Full-HD 1080p 24" wide-angle MVA panel
- Rich dynamic display with latest technology
- Supported by most management solutions

Suitable for

- Airports & train stations
- Hospitality and conference venues
- Electronic menu boards
- Stadium and campus video streaming

Technical Specifications

POPAI Screen Media Standards Support

HTML5, JavaScript, and CSS
 W3C SMIL for cross-platform management
 W3C Widgets for HTML delivery
 RTSP streaming with H.264 multi-casting
 S1 (JPEG 480p baseline)
 S2 (JPEG 720p baseline)
 S3 (JPEG 1080p baseline)
 S4 (MPEG L2 audio)
 S5 (MP3 audio, 384Kbps)
 S6 (MPEG-1 SIF, 3Mbps CBR)
 S7 (MPEG-1 480p, 10Mbps CBR)
 S8 (MPEG-1 720p, 15Mbps CBR)
 S9 (MPEG-2 480p, 6Mbps CBR)
 S10 (MPEG-2 720p, 12Mbps CBR)
 S11 (H.264/MPEG-4 AVC, 480p, 6Mbps CBR)
 S12 (H.264/MPEG-4 AVC, 720p, 10Mbps CBR)
 E1 (PNG 24bpp+alpha, 480p)
 E2 (PNG 24bpp+alpha, 720p)
 E3 (PNG 24bpp+alpha, 1080p)
 E4 (VC-1/WMV9, MP@ML, 720p)
 E5 (VC-1/WMV9, MP@HL, 1080p)
 E6 (MPEG-2, 1080p, 20Mbps CBR)
 E7 (MPEG-4 ASP, 480p, 10Mbps CBR)
 E8 (H.264/MPEG-4 AVC, 720p, 10Mbps CBR)
 E9 (H.264/MPEG-4 AVC, 1080p, 25Mbps CBR)

Digital Signage Features

Multi-zone screen layout, transparent PNG overlay, and graphical scrolling ticker. Auto-play starts playing scheduled contents automatically when power is re-established.

Automatic error recovery with built-in WDT. Real-time clock keeps time for up to 12 hours unplugged. Automatic NTP keeps time and date in sync.

HTML5 Support

SmartWidgets™ for calendar, clock, news, weather, Twitter, and web page integration, HTML5 technologies including CSS and Javascript. WebKit-based browser engine, same as Google Chrome™ and Apple Safari® browsers

Playback Control

Real-time clock playlist events
 Network playlist sync
 USB direct sync

Display and Sound

24" 16:9 MVA TFT LCD panel
 LED backlight
 250 nits maximum brightness
 1920 x 1080 Full HD resolution
 Built-in stereo speakers 2Wx2

Local Storage

Internal 4 GB flash memory (approx. 90 min of high def. video @5 Mbps)
 CF card slot (card replaces internal storage)

Network Connectivity and I/O Ports

Wi-Fi: IEEE 802.11 b/g/n
 Ethernet: RJ45 Port
 USB x 2
 3.5 mm stereo Audio out
 5-Button OSD control

Mounting Options

VESA MIS-D 100 mounting points
 VESA MIS-E 200 mounting points

Accessories

Power adapter
 Ethernet cable
 Wi-Fi antenna
 Monopod flex stand
 (Optional) PVK-202 VESA display stand

Power supply

Universal AC adapter: 12V DC / 5A
 UL/PSE (Japan) certified

Power consumption

36 Watts (video playback at 100% brightness)

Environmental

Operating temperature: 0 to 40°C
 Humidity: 5 - 85% @ 40°C, non-condensing

Dimensions (WxHxD)

22.7" X 13.5" X 2.7"
 (576mm X 344mm X 69 mm)

Weight


Approx. 11 lbs (5kg)

Certifications

CE/FCC/RoHS

Warranty

1-year limited parts & labor

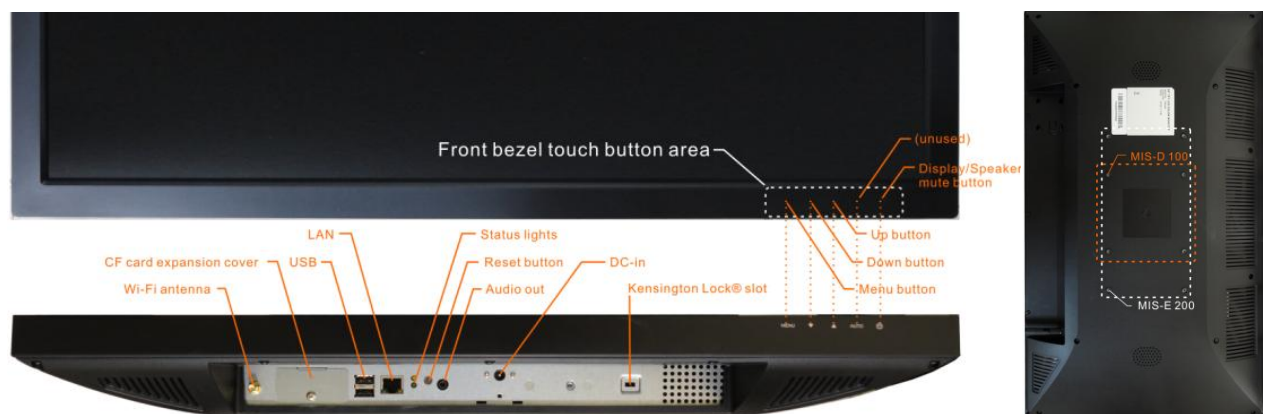

Distribution Europe:

itworx-pro GmbH
 Am Stadtrand 50
 D-22047 Hamburg/Germany
 Tel.: +49 (0) 40 / 696 53 77-0
 Fax: +49 (0) 40 / 696 537-719